


S178LDF Core Alignment Large Diameter Fiber Fusion Splicer

The FITEL S178LDF Core Alignment Large Diameter Fiber Fusion Splicer is able to splice fibers of up to 450µm in cladding diameter. Its robust, compact and hand-held design allows the operator to use it at any location. The fast splicing and heating, as well as simple operation, maximize the working efficiency.



Feature

- Available for Large Diameter Fiber of up to 450µm in cladding diameter
- Rugged and compact design
- Available for hand-held operation
- Fast splicing & heating
- Available for operation by internal battery
- RoHS compliant

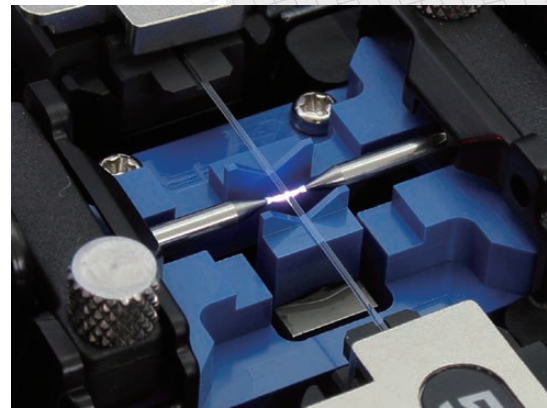

Specification

Applicable Fibers	LDF, SM, MM
Cladding Diameter	125 to 450µm
Coating Diameter	150 to 2000µm
Fiber Cleave Length	10mm
Average Splice Loss	SM: 0.02dB, MM: 0.01dB (125µm cladding fiber)
Splice Time	9 seconds (125µm cladding SM fiber)
Heat Time *1)	31 seconds *1) (S922: 40mm Sleeve, S921: 60mm Sleeve)
Splice Programs	Max. 150
Heat Programs	Max. 18
Applicable Sleeves	20 / 40 / 60 mm
Splice Memory	Max. 2000
Dimension	159 W x 231D x 130 H mm (including shock absorber)
Weight	1.9 kg (without battery)
Monitor	3.5" color LCD monitor
Data Output	USB ver.2.0 mini
Battery Capacity *2)	Typical 60 splice / heat cycles with single battery
Operating Temperature	-10 to +50°C (0 to 95% Relative Humidity [Non-Condensing])
Storage Temperature	-40 to +60°C (0 to 95% Relative Humidity [Non-Condensing])
Humidity	0 to 95% Relative Humidity (Non-Condensing)
Power Source	AC Input 100 to 240 V (50/60Hz), DC Input 11 to 17 V

* 1) The first heating after turning on the power can be longer than the usual heating time.

* 2) The number of splicing and heating cycles the machine can produce using a fully charged brand new battery at room temperature of 20°C, semi-auto mode for splicing 125µm cladding fiber and regular mode for heating. Depending on the condition of the battery and operation environment, the number can vary.

Standard Package

Item	P/N	Quantity
① S178LDF Main Body *3)	S178-L-A-0001	1
② Hard Carrying Case	HCC-01	1
③ Battery Pack	S943B	1
④ Spare Electrodes	S969	1pair
⑤ AC Adapter for S178LDF	S976B	1
⑥ AC Cable Cord	-	1
⑦ Electrode Sharpener	D5111	1
⑧ Cleaning Brush	VGC-01	1
User Manual	FTS-B410	1

* 3) Without Fiber Holder



Optional Accessories

Item	P/N	Quantity
① Soft Carrying Case	SCC-01	1
② Cooling Tray	CTX-01	1
③ Angled Stand	AGS-01	1
④ Battery Pack	S943B	1
⑤ Battery Charger	S958C	1
⑥ USB Cable	USB-01	1
⑦ Removable Fiber holder *4)		
250µm coating diameter fiber	S712S-250	1pair
500µm coating diameter fiber	S712S-500	1pair
900µm coating diameter fiber	S712S-900	1pair

* 4) Fiber holders in other coating size are available.
Please inform us about the coating diameter in the range of 150-2000µm.



Introduction of Other Fusion Splicer

S183PMII ver.2

(up to 500µm cladding fiber)

S184PM-SLDF ver.2

(up to 1200µm cladding fiber)

For PM fiber
and Large diameter fiber



Related Tools

Stripper

3SAE Thermal Stripper- High Strength Adjustable
ACC-01-0059

【 Key Features 】

- Supports fibers with cladding diameters from 30µm to 1000µm, with buffer diameters up to 1200µm
- Adjustable temperature and time settings for different fiber coatings
- Dimensions : 129.5W × 73.5D × 71H mm
- Weight : 445 g



Cleaver for Large diameter fiber

Northlab ProCleave LD™
CL-01-01000

【 Key Features 】

- For fiber claddings from 125µm to 550µm and coatings up to 900µm
- Low cleave angles (typically <0.5°)
- Can be powered with battery or external power supply
- Dimensions : 150W×100D×60Hmm(without lever)
- Weight : 1.1 kg



Contact Us :

FURUKAWA ELECTRIC CO., LTD.

Head Office:

2-3, Marunouchi 2-chome,
Chiyoda-ku, Tokyo,
100-8322, Japan
Tel: + 81 3 3286 3227
Fax: + 81 3 3286 3978
www.furukawa.co.jp
fec.abr_opt_splicer@furukawaelectric.com

Europe:

Furukawa Electric Europe Ltd.
Furukawa House
77-85 Fulham Palace Road,
London W6 8JD, U.K.
Tel: + 44 (0) 20 7313 5300
Fax: + 44 (0) 20 7313 5310
www.furukawa.co.uk
splicers@furukawa.co.uk

North & South America:

OFS Fitel, LLC
2000 Northeast Expressway
Norcross, Georgia 30071, U.S.A
Toll free: + 1 866 452 9516
Tel: + 1 678 783 1090
Fax: + 1 678 783 1093
www.ofsoptics.com
splicers@ofsoptics.com

China:

Furukawa Shanghai, Ltd.
Beijing Branch
Room 314, Beijing Fortune Building,
No.5, North Dongsanhuan Road,
Beijing 100004 P.R. China
Tel: + 86 10 8591 0608
Fax: + 86 10 8591 0609
www.furukawa-sh.cn

South East Asia:

Furukawa Electric Singapore Pte. Ltd.
60 Albert Street, #13-10 OG
Albert Complex, Singapore
189969
Tel: + 65 6224 4686
Fax: + 65 6336 2635
comms@furukawa.com.sg

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan.

In addition, the Export Administration Regulations (EAR) of the United States may be applicable.

In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost.

Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.

* Furukawa Electric reserves the right to improve, enhance, or modify the features and specifications of FITEL products without prior notification.