




A Furukawa Company

AllWave® FLEX+ Fiber - Zero Water Peak

Optimized Bend Performance and Reliable Low Loss Transmission for In-Building, Central Office and Cabinet Applications

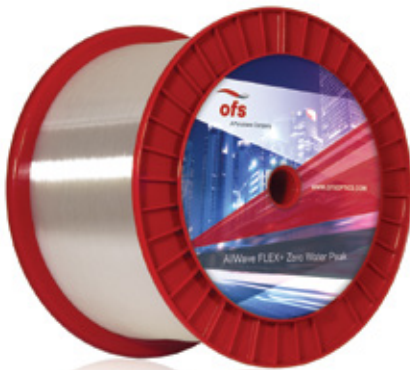

Applications

AllWave FLEX+ Fiber provides outstanding bend performance and design freedom for fiber management systems in:

- FTTX – Multi-dwelling Units (MDUs)
- FTTX – In building applications
- FTTX – Drop cables
- The central office
- High power applications
- Closures
- At the customer premises
- Any application with transmission speeds of 40 Gb/s and beyond

Features and Benefits

- Zero Water Peak fiber with 40% increase in usable spectrum enables 18-channel CWDM support and much greater DWDM capacity
- Coiled into a 7.5 mm radius loop, fiber incurs losses of < 0.5 dB @ 1550 nm and < 1.0 dB @ 1625 nm
- Tight geometric control for very low splice loss and improved connector performance
- Ultra-low PMD for speed and distance upgrades
- High-purity synthetic silica for long-term attenuation stability and mechanical reliability

Overview

AllWave FLEX+ Zero Water Peak (ZWP) Single-Mode Fiber is the industry's first ZWP fiber that meets and exceeds both ITU-T G.657.A2 and G.652.D specifications. This bend-optimized fiber offers enhanced bend performance for tight, low loss bends without risking fiber strength and long-term reliability.

Product Description

While AllWave FLEX+ ZWP Fiber retains all the performance benefits of AllWave ZWP Fiber, it also provides very low bending loss across the full 1260 nm - 1625 wavelength range. This fiber's macrobending and microbending loss improvements combine with its strength and reliability to help (1) allow more compact, intricate cabinet and enclosure designs; (2) protect against excessive loss from inadvertent fiber bends; and (3) reduce potential damage from cable flexing, pulling and crushing.

While AllWave FLEX+ ZWP Fiber provides twice the microbend protection of conventional single-mode fibers in high-stress and low-temperature environments, it is fully compatible and compliant with the embedded fiber base.

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.

North America
Telephone: 508-347-8590
Toll Free: 800-799-7732
Fax: 508-347-1211
E-mail: fibersalesnar@ofsoptics.com

Asia Pacific
Telephone: +852 2506 5054
Fax: +852 2506 0166
E-mail: fibersalesap@ofsoptics.com

Caribbean, Latin America
Telephone: +1-508-347-8590
Fax: +1-508-347-1211
E-mail: fibersalescala@ofsoptics.com

Japan
Telephone: +81-3-3286-3424
Fax: +81-3-3286-3708 or 3190
E-mail: fibersalesjapan@ofsoptics.com

Europe, Middle East, Africa
Telephone: +45-43 48 3736
Fax: +45 4348 3444
E-mail: ofssalesdk@ofsoptics.com

China
Telephone: +86 10 6505 3660
Fax: +86 10 65059515
E-mail: fibersaleschina@ofsoptics.com



Copyright © 2021 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: fiber-144 Date: 01/21

AllWave is a registered trademark of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Product Specifications

Physical Characteristics

Clad Diameter	125.0 ± 0.7 μm
Clad Non-Circularity	≤ 0.7 %
Core/Clad Concentricity Error (Offset)	≤ 0.5 μm, < 0.2 μm typically
Coating Diameter (Uncolored)	237 - 247 μm
Coating-Clad Concentricity Error (Offset)	≤ 12 μm
Tensile Proof Test	100 kpsi (0.69 GPa)
Coating Strip Force	Range: 1.0 N ≤ CSF ≤ 8.9 N
Standard Reel Lengths	50.4 km (31.3 miles)

Optical Characteristics

Attenuation	Maximum	Typical
at 1310 nm	≤ 0.35 dB/km	≤ 0.33 dB/km
at 1385 nm	≤ 0.31 dB/km	≤ 0.28 dB/km
at 1490 nm	≤ 0.24 dB/km	≤ 0.21 dB/km
at 1550 nm	≤ 0.21 dB/km	≤ 0.19 dB/km
at 1625 nm	≤ 0.24 dB/km	≤ 0.20 dB/km

Attenuation vs. Wavelength¹

Range (nm)	Reference (nm) λ	α
1285 – 1330	1310	0.03
1360 – 1480	1385	0.04
1525 – 1575	1550	0.02
1460 – 1625	1550	0.04

¹ The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α.

Attenuation Uniformity / Point Discontinuities at 1310 nm and 1550 nm	≤ 0.05 dB
---	-----------

Macrobending Attenuation:

The maximum attenuation with bending does not exceed the specified values under the following deployment conditions:

Deployment Condition	Wavelength	Induced Attenuation
1 turn on a 7.5 mm radius mandrel	1550 nm	≤ 0.5 dB
	1625 nm	≤ 1.0 dB
1 turn on a 10 mm radius mandrel	1550 nm	≤ 0.1 dB
	1625 nm	≤ 0.2 dB
10 turns on a 15 mm radius mandrel	1550 nm	≤ 0.03 dB
	1625 nm	≤ 0.1 dB

Chromatic Dispersion

Zero Dispersion Wavelength (λ ₀)	1302 - 1322 nm
Zero Dispersion Slope (S ₀)	≤ 0.090 ps/nm ² -km
Typical Dispersion Slope	0.087 ps/nm ² -km

Cut-off Wavelength (λ _{cc})	≤ 1260 nm
---------------------------------------	-----------

Group Refractive Index

at 1310 nm	1.467
at 1550 nm	1.468

Mode Field Diameter

at 1310 nm	8.6 ± 0.4 μm
at 1550 nm	9.4 - 10.4 μm (typical)

Polarization Mode Dispersion (PMD)³

Fiber PMD Link Design Value (LDV) ⁴	< 0.06 ps/√km
Maximum Individual Fiber	< 0.1 ps/√km
Typical Fiber LMC PMD	< 0.02 ps/√km

² As measured with low mode coupling (LMC) technique in fiber form, value may change when cabled. Check with your cable manufacturer for specific PMD limits in cable form.

³ The PMD Link Design Value complies with IEC 60794-3, September 2001 (N = 20, Q = 0.01%). Details are described in IEC 61282-3 TR Ed 2, October 2006.

Environmental Characteristics (at 1310, 1550 & 1625 nm)

Temperature Cycling (-60 + 85 °C)	≤ 0.05 dB/km
High Temperature Aging (85 ± 2 °C)	≤ 0.05 dB/km
Temperature & Humidity Cycling (at -10 °C to +85 °C and 95% RH)	≤ 0.05 dB/km
Water Immersion (23 ± 2 °C)	≤ 0.05 dB/km
Dynamic Fatigue Stress Corrosion Parameter	(n ₀) ≥ 20