




A Furukawa Company

## InvisiLight® EZ-Hide Behind-the-Wall Module

Reduces the Footprint of InvisiLight ILU Solution Installations by up to 50%

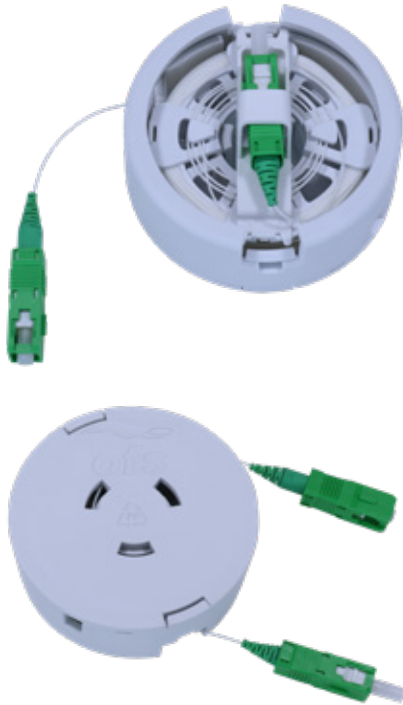

**InvisiLight EZ-Hide  
Behind-the-Wall Module**

### Key Features

- Enables virtually invisible surface mount fiber deployment inside living units and offices.
- Optimized for wall mount ONT applications
- InvisiLight 600  $\mu\text{m}$  buffered optical fiber on a spool with factory terminated and tested connectors on both ends.
- 55% smaller than original InvisiLight 900  $\mu\text{m}$  fiber for even less visible, faster, and easier installation.
- Spool mounts and spins in compact module to provide integrated slack management and enable a moving spool installation process.
- Up to 40 meters (132 ft) of fiber on spool supports nearly every installation need.
- EZ-Bend® 2.5 mm minimum bend radius to handle 50 corners with negligible bend loss.
- Module is mounted in the wall and the inside end connects to a wall mount ONT or SlimBox® Faceplate
- Fits inside common 18+ cubic inch single gang boxes (Compatible with: Carlon B120R, Pass & Seymour S118W, and other single gang boxes 18+ cu in.)
- RoHS-compliant; free from heavy metals and environmentally friendly

### Product Description

The InvisiLight EZ-Hide Behind-the-Wall Module can be mounted and hidden behind a wall mount ONT or SlimBox wall plate, to support FTTx installations inside living units or offices. The module is part of the InvisiLight ILU Solution and installs using the same InvisiLight adhesive system and tools as the original InvisiLight ILU Solution, which are sold separately.

InvisiLight EZ-Hide Behind-the-Wall Module includes:

- A 40-meter spool of InvisiLight® 600  $\mu\text{m}$  fiber terminated with SCA or LC connectors
- A base to mount the spool and cover that fits over the base to facilitate fiber pay-off
- Hook and loop adhesive square for mounting in gang box

The InvisiLight EZ-Hide Module Kit includes a InvisiLight EZ-Hide Module and a SlimBox Wall Plate for desktop ONT applications.

InvisiLight® EZ-Hide Behind-the-Wall Module Specifications	
<b>Product Characteristics</b>	
<b>Connector Type</b>	SC or LC
<b>Polishing Type</b>	APC or UPC
<b>Fiber Type</b>	EZ-Bend® Optical Fiber G.657.B3
<b>Faceplate Dimensions (H x L x D)</b>	4.8 in. x 2.3 in. x 0.74 in.
<b>Material</b>	Plastic, UL94V-0
<b>Color</b>	White
<b>Operating Temperature</b>	-40 to +85 °C
<b>Storage Temperature</b>	-40 to +85 °C
<b>Optical Characteristics</b>	
<b>Insertion Loss</b>	≤0.50 dB SCA - maximum
<b>Return Loss</b>	≥60 dB

**InvisiLight EZ-Hide Behind-the-Wall Module Ordering Information**

Comcode	Product Code	Description
301160057	NVSLGHTC-D-SCASCA-1-EZHIDE-40M-1/EA	EZ-Hide Module with 600 µm InvisiLight fiber spool, SCA to SCA, 40 meters
301160065	NVSLGHTC-D-SCASCA-1-EZHIDE-KIT-40M-1/EA	EZ-Hide Kit: includes SlimBox® wall-plate with 1 SCA adapter, EZ-Hide Module with 600 µm InvisiLight fiber spool, SCA to SCA, 40 meters



**For additional information please contact your sales representative.**

You can also visit our website at [www.ofsoptics.com](http://www.ofsoptics.com) or call 1-888-fiberhelp (1-888-342-3743) USA or 1-770-798-5555 outside the USA.



Copyright © 2022 OFS Fitel, LLC.  
All rights reserved, printed in USA.

OFS Marketing Communications  
Doc ID: fap-406 Date: 09/22

InvisiLight, EZ-Bend, and SlimBox are registered trademarks of OFS Fitel, LLC.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

For a full list of our certifications, visit our website.

